


BIS Bifix® G2


The next generation



BIS Bifix® G2 Clamp


- For indoor & outdoor use
- Increased strength
- Both lined and unlined available
- Full range Ø 10 – 225 mm

Comfortable
& secure
to install

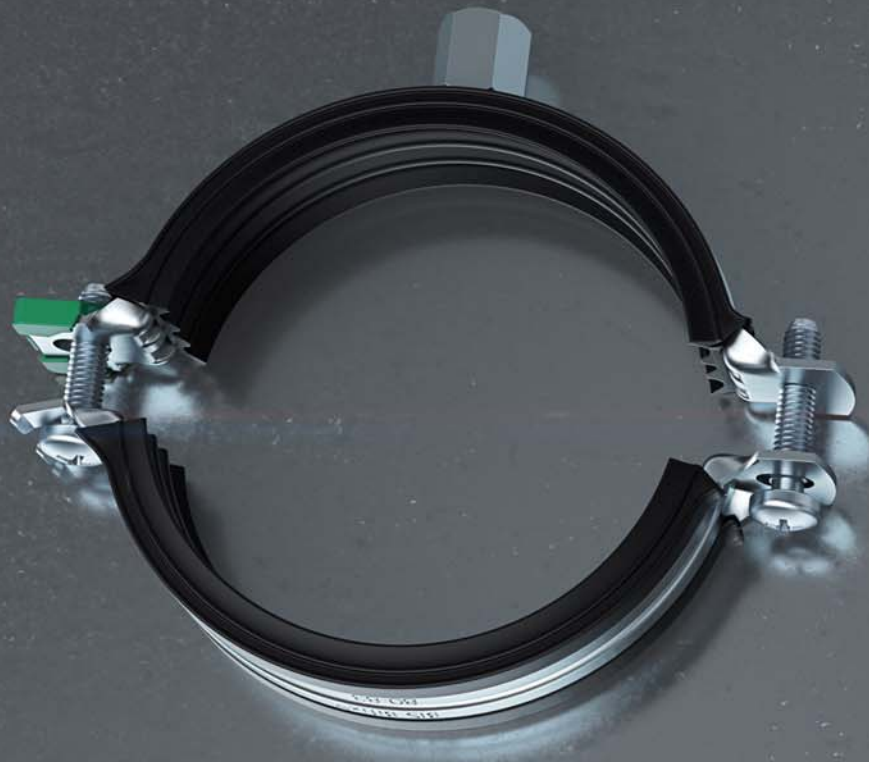


BIS


Easy to use

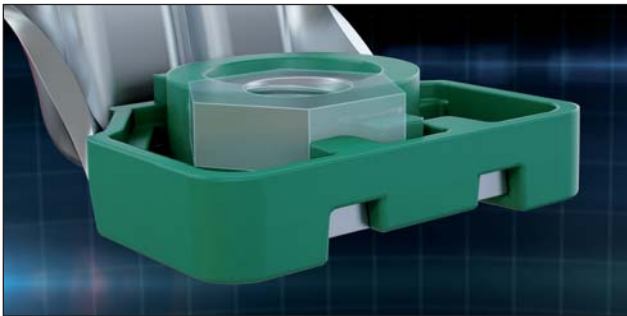

Hammer with captive nut

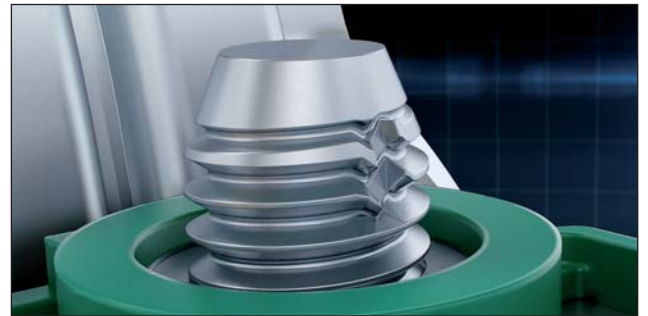

Anti-loss screw

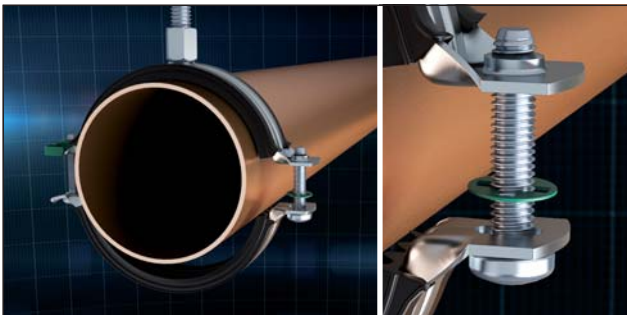


Distance ring for easy installation



Innovative locking; interlocking for more security

Bifix[®] G2

Increased strength

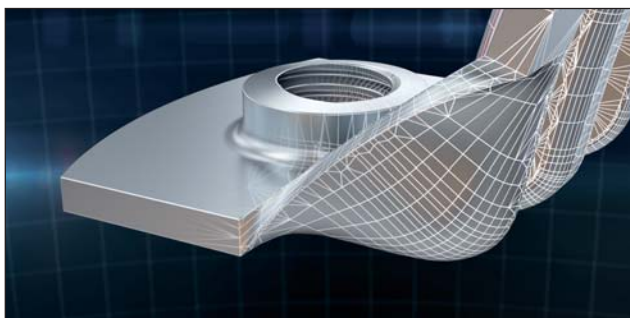

Advanced geometry; folded edges at clamp's lip



Advanced geometry; broader and deeper ridges

For indoor & outdoor use



Extreme corrosion resistance, unique in HVAC

Sound insulation




Noise reducing thick rubber lining

BIS Bifix® G2

The next generation

walraven

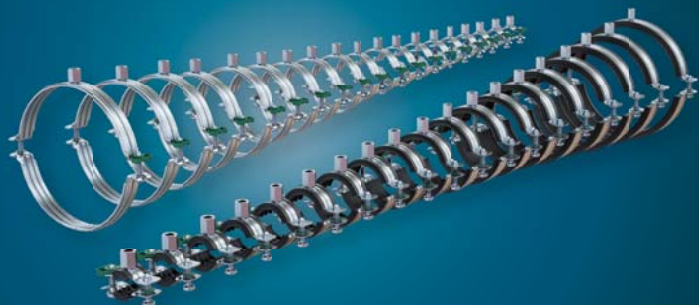

Full range of lined and unlined clamps




10 mm 83 mm 169 mm 225 mm

Technical data

Pipe Ø				Connection nut (G)	
D (mm)	D (")	DN (mm)	b x s (mm)	M8/M10	M8/M10
10 - 14	1/4	8	20 x 1.25	300 8 014	310 8 014
15 - 19	3/8	10	20 x 1.25	300 8 019	310 8 019
20 - 23	1/2	15	20 x 1.25	300 8 023	310 8 023
25 - 28	3/4	20	20 x 1.25	300 8 028	310 8 028
31 - 35	1	25	20 x 1.25	300 8 035	310 8 035
36 - 39	-	-	20 x 1.25	300 8 039	310 8 039
40 - 45	1 1/4	32	20 x 1.25	300 8 045	310 8 045
48 - 52	1 1/2	40	20 x 1.25	300 8 052	310 8 052
54 - 58	-	-	20 x 1.25	300 8 058	310 8 058
60 - 64	2	50	20 x 1.25	300 8 064	310 8 064
66 - 70	-	-	20 x 1.5	300 8 070	310 8 070
75 - 79	2 1/2	65	20 x 1.5	300 8 079	310 8 079
80 - 83	-	-	20 x 1.5	300 8 083	310 8 083
88 - 91	3	80	23 x 2.0	300 8 091	310 8 091
100 - 105	-	-	23 x 2.0	300 8 105	310 8 105
108 - 115	4	100	23 x 2.0	300 8 115	310 8 115
125 - 130	-	-	23 x 2.0	300 8 130	310 8 130
133 - 140	5	125	23 x 2.0	300 8 140	310 8 140
152 - 160	-	-	23 x 2.0	300 8 160	310 8 160
165 - 169	6	150	25 x 2.5	300 8 169	310 8 169
176 - 180	-	-	25 x 2.5	300 8 180	-
192 - 200	-	-	25 x 2.5	300 8 200	-
205 - 210	-	-	25 x 2.5	300 8 210	-
219 - 225	8	200	25 x 2.5	300 8 225	-

- Quick locking system
- Surface protection: product is part of the BIS UltraProtect® 1000 System.
- Noise insulating EPDM lining according to DIN 4109
- Age resistant lining

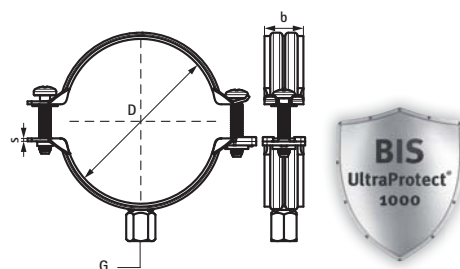

For more information

BIS Bifix® G2 animation



www.walraven.com/gr/bis-bifix-int

BIS UltraProtect® 1000



www.bis-ultraprotect.com

United Kingdom

Ireland

Walraven Ltd.

Thorpe Way, Banbury (GB)
Oxon, OX16 4UU
Tel. +44 (0)1295 75 34 00
Fax +44 (0)1295 75 34 28
sales.uk@walraven.com

Other countries

Walraven International

P.O. Box 15
3640 AA Mijdrecht (NL)
Tel. +31 (0)297 23 30 00
Fax +31 (0)297 23 30 99
export@walraven.com

Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE) · Banbury (GB) · Malmö (SE) · Grenoble (FR) · Barcelona (ES) · Kraków (PL)
Mladá Boleslav (CZ) · Moscow (RU) · Kyiv (UA) · Detroit (US) · Shanghai (CN) · Dubai (AE) · Budapest (HU)

walraven.com

GB:

