




**CONNECT AND PROTECT**

# nVent CADDY Pyramid

Rooftop Support System

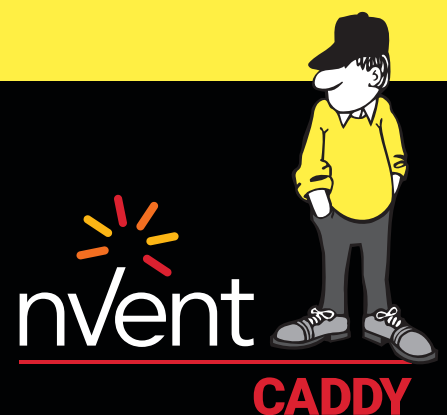

# Plumbing & HVAC Applications



## WHY BUY NVENT CADDY PYRAMID

For Engineers and Consultants:

### CHALLENGE:

- Properly support heavy loads
- Minimize the chance of point loading or abrading the roof membrane
- Ensure chemical compatibility with anything you place on the roof membrane

### PYRAMID SOLUTION:

- Pyramid offers a broad portfolio compatible with most roof surfaces, including single-ply, bituminous, metal and spray foam
- Pyramid provides excellent load distribution with some of the industry's best load ratings
- Pyramid minimizes point loading and roof abrasion
- Pyramid is UV stable, corrosion resistant, and durable over an extensive temperature range

# Electrical Applications



# Equipment Support Applications



## WHY BUY PYRAMID

### For Building Owners:

#### CHALLENGE:

- Roofs not only protect some of the most valuable assets, they often represent a significant cost to replace and maintain
- Substandard materials and methods can increase the chance of roof damage
- Increasingly, roofs are seen as prime real estate and are being utilized for equipment placement, alternative energy systems, and as green space

#### PYRAMID SOLUTION:

- Pyramid is extremely roof compatible
- Pyramid is designed to minimize the chance of damage to roofs
- Pyramid is fast and easy to install, minimizing costs
- Pyramid provides an aesthetically pleasing, flexible engineered solution designed to meet the challenges of densely populated roofs



## WHY BUY PYRAMID

### For Contractors and Installers:

#### CHALLENGE:

- Meet the project scope and stay within budget
- Provide a high quality installation
- Need a fast and easy to install solution
- Adapt to a broad range of applications and roof materials

#### PYRAMID SOLUTION:

- Pyramid is designed to get installers on and off the roof quickly
- Pyramid creates an aesthetically pleasing, high quality solution
- Pyramid offers a broad portfolio of solutions that simplify material management

Pyramid rooftop supports are a surface mounted solution for supporting electrical and mechanical applications on a variety of roof surfaces.

They offer superior load capacity and dramatically reduce installation time by replacing slow, heavy and labor-intensive methods for support of pipe, conduit, duct, cable tray and equipment.

Unlike wood blocks, Pyramid supports are specifically designed for rooftop applications, incorporating unique materials and finishes that protect roof membranes and provide superior corrosion protection.

Hot-dip galvanized  
for superior  
corrosion protection

UV stabilized  
for long lasting  
performance



Foam bottom offers low  
abrasion interface for better  
roof membrane protection

Compatible with roof surfaces  
including single ply, bituminous,  
metal and spray foam

**"Our clients' roofs are a significant investment. Protecting these assets requires the use of engineered solutions that can withstand the test of time, which is why we have standardized on the Pyramid family of roof top supports."**

Chris Denman, Vice President and Partner  
Roof Management, LLC

**Load  
Rating**

- Fewer supports required for the same load
- Less material, less labor

**Load  
Distribution**

- Minimizes point loading and stress concentrations
- Reduces likelihood of roof membrane damage


**Foam  
Bottom**

- Provides roof membrane compatibility
- Eliminates the need for a separation sheet

**nVent CADDY Quality  
and Innovations**

- More than 14 years of designing and building high-quality rooftop support solutions
- Continuously innovating for over 110 years

# Rooftop Supports: Load Distribution

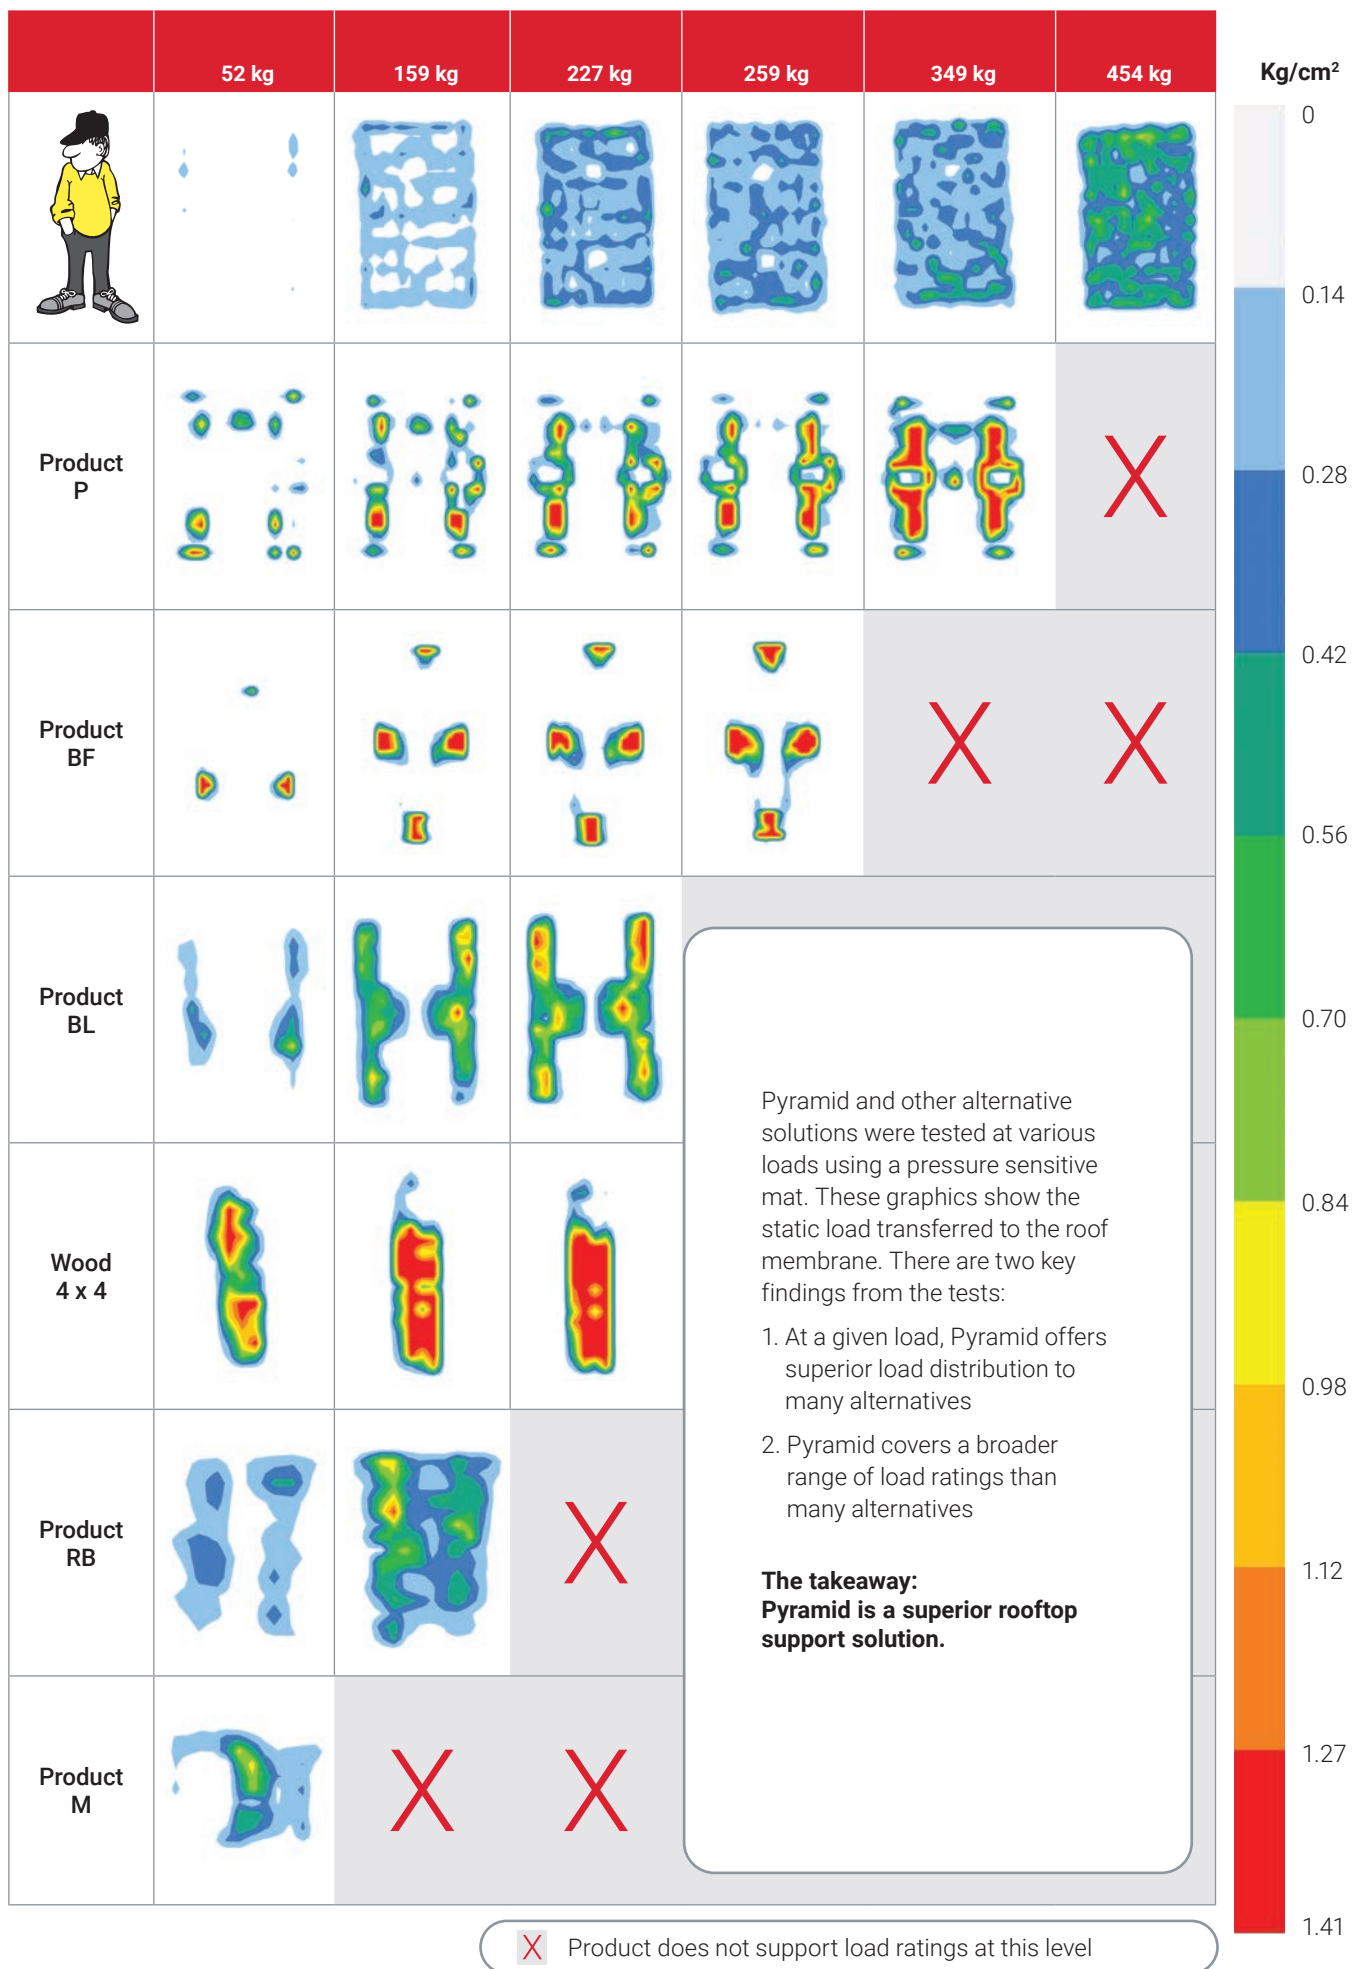

# nVent CADDY Pyramid ST Strut-Based Supports

Pyramid ST Strut-Based Supports offer an ideal solution for mounting electrical and mechanical applications to strut. Superior load distribution and a low abrasion foam interface combine to ensure that the roof membrane is protected despite varying roof surfaces and shifting caused by expansion and contraction.

- Provides superior load distribution, even with varying rooftop surfaces
- Ready to use out of the box, saving installation time and labor
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Foam bottom offers low abrasion interface for better roof membrane protection
- Hot-dip galvanized and UV stabilized for long lasting performance



## PYRAMID ST FIXED STRUT SUPPORTS

Provides a fixed-height mounting platform with 152 mm, 254 mm, or 457 mm of usable strut length.

- Provides superior support for pipe, conduit, duct, cable tray and equipment
- Multiple sizes and load ratings offer the ability to tailor the solution to the application
- Easy to transport to the roof

Material: Polyethylene, Polypropylene, Steel  
Finish: Hot-dip galvanized  
Temperature: -45 to 65°C  
Static Load Safety Factor: 3:1

| Part Number | Article Number | Strut Length | Height | Static Load |
|-------------|----------------|--------------|--------|-------------|
| PSF6C       | 360463         | 152 mm       | 122 mm | 1,334 N     |
| PSF10C      | 360464         | 254 mm       | 122 mm | 4,450 N     |
| PSF10D      | 360465         | 254 mm       | 163 mm | 4,450 N     |
| PSF16C      | 360466         | 406 mm       | 122 mm | 6,670 N     |
| PSF16D      | 360467         | 406 mm       | 163 mm | 6,670 N     |

**“We have standardized on Pyramid ST Series Supports for our cable tray installations. They are extremely simple to use and provide a lower total installed cost than wood blocks, concrete slabs, and other engineered solutions.”**

Alain Lemaire,  
Purchasing & Project Manager | G2EI






### PYRAMID ST ADJUSTABLE STRUT SUPPORTS

Allows elevation changes of up to 457 mm off the roof surface with 254 mm or 406 mm of usable strut length.

- Height adjustability provides effective navigation of pipe, conduit, duct and cable tray around obstructions
- Multiple sizes and load ratings offer the ability to tailor the solution to the application

Material: Polyethylene, Polypropylene, Steel  
 Finish: Hot-dip galvanized  
 Temperature: -45 to 65°C  
 Static Load Safety Factor: 3:1

| Part Number | Article Number | Strut Length | Height       | Static Load |
|-------------|----------------|--------------|--------------|-------------|
| PSA10CH13   | 360468         | 254 mm       | 152 – 330 mm | 4,450 N     |
| PSA16AH18   | 360469         | 406 mm       | 178 – 457 mm | 6,670 N     |



### PYRAMID ST BRIDGE ASSEMBLIES

Provides a fixed-height mounting platform off the roof surface with 610 mm to 1524 mm of usable strut length.

- Ideal for supporting multiple pipe runs, cable tray and air handling units
- Multiple sizes and load ratings offer the ability to tailor the solution to the application

Material: Polyethylene, Polypropylene, Steel  
 Finish: Hot-dip galvanized  
 Temperature: -45 to 65°C  
 Static Load Safety Factor: 3:1

| Part Number | Article Number | Strut Length | Height | Static Load |
|-------------|----------------|--------------|--------|-------------|
| PSB24A      | 360475         | 610 mm       | 142 mm | 8,900 N     |
| PSB30A      | 360476         | 762 mm       | 142 mm | 8,900 N     |
| PSB36A      | 360477         | 914 mm       | 142 mm | 8,900 N     |
| PSB42A      | 360478         | 1,067 mm     | 142 mm | 13,340 N    |
| PSB48A      | 360479         | 1,219 mm     | 142 mm | 13,340 N    |
| PSB60A      | 360480         | 1,524 mm     | 142 mm | 13,340 N    |

Static loads are assumed to be uniformly distributed.



# Pyramid H-Frame

Pyramid H-Frame Series Support System is a fast and economical solution for a variety of rooftop applications where support height and width exceed those of the Pyramid ST or Pyramid RL series. It provides an ideal support solution for duct, large diameter pipe or cable tray. Superior load distribution and a low abrasion foam interface combine to ensure that the roof membrane is protected despite varying roof surfaces and shifting caused by expansion and contraction.

- Foam or rubber bottom offers low abrasion interface for better roof membrane protection
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Provides superior load distribution, even with varying rooftop surfaces
- Rubber rooftop interface ideal for solar panel array installations
- Hot-dip galvanized and UV stabilized for long lasting performance
- Accepts standard strut channels



Material: Polyethylene, Polypropylene, Steel  
 Finish: Hot-dip galvanized  
 Temperature: -34 to 54°C  
 Static Load Safety Factor: 3:1  
 Strut Type: A

## PYRAMID H-FRAME POST BASE

- Mounting hardware pre-installed in bases

| Part Number | Article Number | Rooftop Interface | Height | Length / Width | Static Load |
|-------------|----------------|-------------------|--------|----------------|-------------|
| PHB         | 360422         | Foam              | 117 mm | 314 mm         | 3,335 N     |
| PHBR        | 360423         | Rubber            | 118 mm | 314 mm         | 3,335 N     |

## PYRAMID H-FRAME KIT



- Kit includes 2 post bases with pre-installed mounting hardware, 6 bolts, 6 strut nuts, and 2 L-brackets to complete H-frame

## SUPPORT ACCESSORY:



### Pyramid H-Frame Hardware Kit

- Kit includes 6 bolts, 6 strut nuts, and 2 L-brackets to build custom multi-tier H-frame assemblies

Material: Steel  
 Finish: Hot-dip galvanized

| Part Number | Article Number | Screw Diameter |
|-------------|----------------|----------------|
| HFRMHDW     | 360424         | M12            |

Material: Polyethylene, Polypropylene  
 Temperature: -34 to 54°C  
 Static Load Safety Factor: 3:1  
 Strut Type: A

| Part Number | Article Number | Rooftop Interface | Height | Length / Width | Static Load |
|-------------|----------------|-------------------|--------|----------------|-------------|
| PHK         | 360420         | Foam              | 117 mm | 314 mm         | 6,670 N     |
| PHKR        | 360421         | Rubber            | 118 mm | 314 mm         | 6,670 N     |

Static load represents 3,335 N per post base. The end user must select and evaluate the strut framing to ensure the assembled H-frame can properly support the applied load.



# Pyramid Equipment Supports

Pyramid Equipment Support is a fast, flexible and innovative system for supporting heavy-duty mechanical services on rooftop surfaces. Superior load distribution and a low abrasion foam interface combine to ensure that the roof membrane is protected despite varying roof surfaces and shifting caused by expansion and contraction.

- Kit includes post-base assemblies, frame and equipment-support clamps
- Assembles and adjusts to size and height in minutes by one person with one tool
- Innovative crossbar and equipment-support clamps enable quick assembly
- Integral foam pad provides gentle interface for all roof types
- Hot-dip galvanized and UV stabilized for long lasting performance
- Assembled support can be lifted as one unit and easily relocated




## PYRAMID EQUIPMENT SUPPORT FRAME EXTENSION KIT

- Allows creation of custom equipment support lengths by attaching the Pyramid Extension Kit in series to a Pyramid Equipment Support Kit
- Kit includes two post-base assemblies, frame and equipment-support clamps for easy attachment to a Pyramid Equipment Support Kit
- Square tube and cross bars provide superior load and deflection capabilities over standard strut profiles
- Assembles and adjusts to size and height in minutes by one person with one tool
- Innovative crossbar and equipment-support clamps enable quick assembly
- Integral foam pad provides gentle interface for all roof types
- Hot-dip galvanized finish provides superior corrosion protection

Material: Steel, Polypropylene, Polyethylene  
Finish: Hot-dip galvanized  
Temperature: -34 to 54°C  
Height: 305 – 457 mm  
Length: 1,588 mm  
Post Base: 314 mm

| Part Number | Article Number | Post Base | Width    | Surface Area | Ultimate Static Load |
|-------------|----------------|-----------|----------|--------------|----------------------|
| PEKEF       | 360493         | 2 pc      | 1,257 mm | 0.18 m       | 4,980 N              |

Static load must be stable and uniformly distributed across frame.  
Pyramid Equipment Support Frame Extension must be used in conjunction with a Pyramid Equipment Support Kit.



## PYRAMID EQUIPMENT SUPPORT KIT, 4 POST BASE

Includes all post bases, hardware and framing needed for an out of the box solution to construct a 1 m equipment support.

Material: Steel, Polypropylene, Polyethylene  
Finish: Hot-dip galvanized  
Temperature: -34 to 54°C  
Height: 305 – 457 mm  
Length: 1,257 mm  
Post Base: 314 mm

| Part Number | Article Number | Post Base | Width    | Surface Area        | Ultimate Static Load |
|-------------|----------------|-----------|----------|---------------------|----------------------|
| PEK4B       | 360426         | 4 pc      | 1,588 mm | 0.36 m <sup>2</sup> | 4,980 N              |

Static load must be stable and uniformly distributed across frame.



## PYRAMID EQUIPMENT SUPPORT KIT, 6 POST BASE

Includes all post bases, hardware and framing needed for an out of the box solution to construct a 2 m equipment support.

Material: Steel; Polypropylene; Polyethylene  
Finish: Hot-Dip Galvanized  
Temperature: -34 to 54°C  
Height: 305 – 457 mm  
Length: 2,172 mm  
Post Base: 314 mm

| Part Number | Article Number | Post Base | Width    | Surface Area        | Ultimate Static Load |
|-------------|----------------|-----------|----------|---------------------|----------------------|
| PEK6B       | 360427         | 6 pc      | 1,588 mm | 0.56 m <sup>2</sup> | 9,960 N              |

Static load must be stable and uniformly distributed across frame.

**“Labor represents over 50% of the costs on our projects. We chose to standardize on Pyramid Equipment Supports for our air handling unit installations, because one person can easily assemble and locate the support unit where required on the roof. This is a very well designed product that saves installation time & keeps me under budget.”**

Ulf Engel, Dipl. -Ing. (FH) | ROKO-Klimatechnik

# Pyramid Equipment Supports





## PYRAMID EQUIPMENT SUPPORT HEIGHT EXTENSION

Height extension used to lift the frame up to 914 mm off the roof surface.

- Increases the height between the equipment support frame and roof deck
- Inserts directly into Pyramid Equipment Support Bases

Material: Steel  
Finish: Hot-Dip Galvanized



## PYRAMID EQUIPMENT SUPPORT POST BASE

Individual post base with height adjustable leg 305 to 457 mm gives you the flexibility to create your own equipment support with strut.

- Ideal for use with strut channel type A and U-shaped brackets to create custom equipment supports
- Height adjustable
- Innovative base design evenly distributes load to help prevent damage to roof membrane
- Base is manufactured from UV-stabilized thermoplastic material

Material: Steel, Polypropylene, Polyethylene  
Finish: Hot-dip galvanized  
Temperature: -34 to 54°C  
Static Load Safety Factor: 3:1

| Part Number | Article Number | H Height | A Post Base Height with Extension | W Width |
|-------------|----------------|----------|-----------------------------------|---------|
| PEH31       | 360494         | 568 mm   | 762 – 914 mm                      | 60 mm   |

| Part Number | Article Number | Height       | Length / Width | Surface Area        | Static Load |
|-------------|----------------|--------------|----------------|---------------------|-------------|
| PEB         | 360425         | 305 – 457 mm | 314 mm         | 0.09 m <sup>2</sup> | 3,340 N     |

## SUPPORT ACCESSORY:



### Pyramid Equipment Support Clamp

Clamp to secure heavy-duty mechanical equipment when creating a custom frame out of strut.

- Ideal for use with strut channel type A and square tube to create custom equipment supports
- Slotted design offers fast and easy installation

Material: Steel  
Finish: Hot-dip galvanized

| Part Number | Article Number | Strut Type |
|-------------|----------------|------------|
| PEC         | 360428         | A          |



# Pyramid EZ Rubber-Based Supports



Feature a wide platform base design to provide reliable support and distribute load across roof surface. These versatile supports are fast and easy to install compared to wood blocks and metal straps.

- Quick height adjustment accommodates for uneven roofs or sloped condensate lines
- No tools or fasteners needed; fast snap-on installation
- Design sheds water and helps reduce pipe corrosion
- Roof-friendly; made of UV-stabilized EPDM material

Material: EPDM-SBR rubber

| Part Number | Article Number | NB / DN | Height       | Ultimate Static Load |
|-------------|----------------|---------|--------------|----------------------|
| RPSE1H24    | 182365         | 25      | 45 – 102 mm  | 756 N                |
| RPSE1H57    | 182370         | 25      | 127 – 178 mm | 756 N                |
| RPSE2H46    | 182375         | 50      | 102 – 152 mm | 1,112 N              |
| RPSE4H46    | 182380         | 100     | 100 – 150 mm | 3,920 N              |


Ultimate load at 6.35 mm deflection. Contact project or roofing engineer for maximum allowable load on individual project roof system.

**“As a roofing membrane manufacturer, the products that we choose for our own roof must reflect the same level of quality and durability as our brand. We chose the Pyramid EZ Series Rooftop Support System during our office roof renovation to replace the original wood blocks that held up the gas lines. They were economical, simple to install, and contributed to the general aesthetics of the roof. Just like our installing contractor said, ‘These nVent CADDY Supports are pretty sweet!’”**

Jerry Beall, Product and Technical Specialist  
FiberTite Roofing Systems, Seaman Corporation



# Pyramid Universal Support

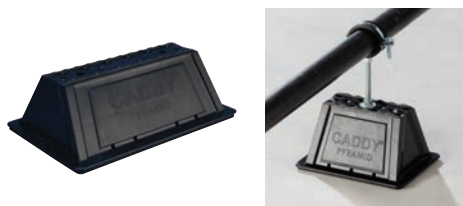

- Captive stainless steel nuts allow for custom attachment methods to the support base including easy attachment of stainless steel strut, threaded rod or other project-specific hardware
- Foam bottom offers low abrasion interface for better roof membrane protection
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Provides superior load distribution, even with varying rooftop surfaces
- Multiple sizes and load ratings offer the ability to tailor the solution to the application
- Base is manufactured from UV-stabilized thermoplastic material


Material: Polyethylene; Polypropylene; Stainless Steel 18-8  
 Temperature: -45 to 65°C  
 Static Load Safety Factor: 3:1  
 Height: 101.6 mm

| Part Number | Article Number | Length   | Width  | Thread Size | Ultimate Static Load |
|-------------|----------------|----------|--------|-------------|----------------------|
| PBU6        | 360495         | 203.0 mm | 152 mm | (3) M10     | 1,334 N              |
| PBU10       | 360496         | 317.5 mm | 203 mm | (2) M10     | 4,450 N              |
| PBU16       | 360497         | 483.0 mm | 203 mm | (2) M10     | 6,670 N              |

**“The Pyramid family allows us to streamline our project operations while delivering an aesthetically pleasing product for our clients.”**

Kyle Laubach, VP of Operations  
 Environmental Roofing and Waterproofing

# Pyramid 25 Pipe and Conduit Support

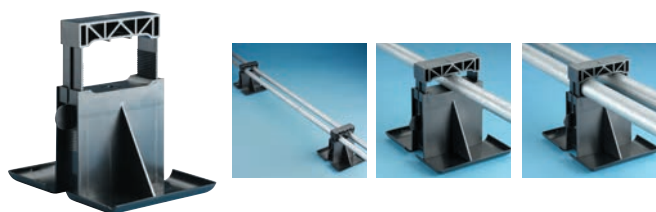

- Lightweight plastic construction
- UV resistant, designed and tested for outdoor use
- No tools or fasteners needed for installation
- Rounded edges to help protect the roof membrane

Material: Acrylonitrile Butadiene Styrene

| Part Number | Article Number | Height   | Static Load |
|-------------|----------------|----------|-------------|
| PPRPS25H4   | 182450         | 112.7 mm | 111 N       |
| PPRPS25H6   | 182460         | 163.5 mm | 111 N       |



# Pyramid Tool-Free Supports

The Pyramid Tool-Free series offers a unique labor saving solution for supporting electrical and mechanical applications on a variety of roof surfaces. The Pyramid Tool-Free series restrains pipe and conduit without the need for strut clamps or installation tools. Superior load distribution and a low abrasion foam interface combine to ensure that the roof membrane is protected despite varying roof surfaces and shifting caused by expansion and contraction.



## PYRAMID TOOL-FREE SUPPORT KIT

Provides a fixed height support 4" (102 mm) off the roof surface for outside pipe diameters between 0.50" – 2.38" (12.7 – 60.3 mm). Kits come in 5.5", 10" or 16" (140 mm, 254 mm, or 406 mm) lengths.

- Clamps install without the need for additional tools or strut clamps
- Additional clamps can be purchased separately for additional pipe runs
- Plastic clamps and base will not corrode pipe
- Clamps come in two different sizes to fit project needs
- Foam bottom offers low abrasion interface for better roof membrane protection
- Provides superior load distribution, even with varying rooftop surfaces
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Ready to use out of the box, saving installation time and labor
- Multiple sizes and load ratings offer the ability to tailor the solution to the application
- Easy to transport to the roof
- Supports green building requirements; thermoplastic bases are made from recycled material and can contribute to earning LEED credits

Material: Polyethylene; Polypropylene; Nylon  
Temperature: –50 to 150°F  
Static Load Safety Factor: 3:1

## SUPPORT ACCESSORY:



### Pyramid Tool-Free Clamp

Two sizes of clamps allow for outside pipe diameters between 0.50" – 2.38" (12.7 – 60.3 mm) to be restrained on top of the Pyramid Tool-Free series base.

- Clamps install without the need for additional tools or strut clamps
- Clamps come in two different sizes to fit project needs
- Plastic clamps and base will not corrode pipe

Material: Nylon  
Temperature: –50 to 150°F

| Part Number | Article Number | Pipe Diameter  |
|-------------|----------------|----------------|
| PTF1C       | 360484         | 12.7 – 22.4 mm |
| PTF2C       | 360485         | 21.3 – 60.3 mm |

| Part Number | Article Number | Surface Area           | Static Load |
|-------------|----------------|------------------------|-------------|
| PTF6        | 360460         | 26,452 mm <sup>2</sup> | 1,334 N     |
| PTF10       | 360461         | 59,355 mm <sup>2</sup> | 4,450 N     |
| PTF16       | 360462         | 91,613 mm <sup>2</sup> | 6,670 N     |

| Part Number | Number of Clamps Included |       | Maximum Clamp Capacity |       |
|-------------|---------------------------|-------|------------------------|-------|
|             | PTF1C                     | PTF2C | PTF1C                  | PTF2C |
| PTF6        | 1                         | –     | 3                      | 1     |
| PTF10       | –                         | 2     | 5                      | 2     |
| PTF16       | –                         | 2     | 7                      | 3     |



# Pyramid Tool-Free Supports



## PYRAMID TOOL-FREE CABLE TRAY SUPPORT KIT

Provides a fixed height support 4" (102 mm) off the roof surface for cable tray. Kits come in 5.5", 10" or 16" (140 mm, 254 mm, or 406 mm) lengths with securing pins included.

- Push-in pins install without the need for additional tools
- Plastic pins and base will not corrode
- Pins and mounting holes accommodate most perforated cable tray
- Ready to use out of the box, saving installation time and labor
- Additional pins can be purchased separately
- Foam bottom offers low abrasion interface for better roof membrane protection
- Provides superior load distribution, even with varying rooftop surfaces
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Multiple sizes and load ratings offer the ability to tailor the solution to the application
- Easy to transport to the roof

Material: Polyethylene; Polypropylene; Nylon  
Temperature: -45 to 65°C  
Static Load Safety Factor: 3:1

| Part Number | Article Number | Surface Area           | Static Load |
|-------------|----------------|------------------------|-------------|
| PTF6P       | 360518         | 26,452 mm <sup>2</sup> | 1,330 N     |
| PTF10P      | 360519         | 59,355 mm <sup>2</sup> | 4,450 N     |
| PTF16P      | 360522         | 91,613 mm <sup>2</sup> | 6,670 N     |



## SUPPORT ACCESSORY:



### Pyramid Tool-Free Cable Tray Pin

Allows for perforated cable tray to be secured on top of Pyramid Tool-Free series bases.


- Push-in pins install without the need for additional tools
- Plastic pins and base will not corrode
- Pins and mounting holes accommodate most perforated cable tra

Material: Nylon  
Temperature: -45 to 65°C

| Part Number | Article Number | Diameter | Length  |
|-------------|----------------|----------|---------|
| PTFP        | 360521         | 20 mm    | 41.9 mm |



# Product Application Review

|            | Product Family        | ST                                                                                | ST Bridge                                                                         | H-frame                                                                           | Equipment Supports                                                                | EZ                                                                                 | PBU                                                                                 | RPS25                                                                               | Tool Free                                                                           |
|------------|-----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            | Page                  | 6-7                                                                               | 7                                                                                 | 8                                                                                 | 9-10                                                                              | 11                                                                                 | 12                                                                                  | 12                                                                                  | 13-14                                                                               |
|            | Image                 |  |  |  |  |  |  |  |  |
|            | Load rating (N)       | 1334-6670                                                                         | 8900-13340                                                                        | 3335-6670                                                                         | 4980-9960                                                                         | 756-3920                                                                           | 1334-6670                                                                           | 111                                                                                 | 1334-6670                                                                           |
|            | Elevation (mm)        | 122-457                                                                           | 122-142                                                                           | Project specific                                                                  | 305-457.<br>(900 max with height extension)                                       | 25-150                                                                             | Project specific                                                                    | 92/143                                                                              | 101                                                                                 |
| Electrical | Conduit <= 25 mm      | x                                                                                 | x                                                                                 |                                                                                   |                                                                                   | x                                                                                  |                                                                                     | x                                                                                   | x                                                                                   |
|            | Conduit <= 50 mm      | x                                                                                 | x                                                                                 |                                                                                   |                                                                                   | x                                                                                  |                                                                                     | x                                                                                   | x                                                                                   |
|            | Conduit <= 100 mm     | x                                                                                 | x                                                                                 |                                                                                   |                                                                                   | x                                                                                  |                                                                                     |                                                                                     |                                                                                     |
|            | Basket Tray <= 400 mm | x                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     | x                                                                                   |
|            | Basket Tray > 400 mm  |                                                                                   | x                                                                                 |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|            | Perforated Tray       | x                                                                                 | x                                                                                 |                                                                                   |                                                                                   |                                                                                    | x                                                                                   |                                                                                     | x                                                                                   |
| Mechanical | Ladder Tray           | x                                                                                 | x                                                                                 |                                                                                   |                                                                                   |                                                                                    | x                                                                                   |                                                                                     |                                                                                     |
|            | Pipe <= 25 mm         | x                                                                                 | x                                                                                 |                                                                                   |                                                                                   | x                                                                                  | x                                                                                   | x                                                                                   | x                                                                                   |
|            | Pipe <= 50 mm         | x                                                                                 | x                                                                                 | x                                                                                 |                                                                                   | x                                                                                  | x                                                                                   | x                                                                                   | x                                                                                   |
|            | Pipe <= 100 mm        | x                                                                                 | x                                                                                 | x                                                                                 |                                                                                   | x                                                                                  | x                                                                                   |                                                                                     |                                                                                     |
|            | Pipe <= 150 mm        | x                                                                                 | x                                                                                 | x                                                                                 |                                                                                   |                                                                                    | x                                                                                   |                                                                                     |                                                                                     |
|            | Pipe > 150 mm         |                                                                                   |                                                                                   | x                                                                                 |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|            | Air Duct              |                                                                                   |                                                                                   | x                                                                                 |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|            | AC unit               |                                                                                   | x                                                                                 | x                                                                                 | x                                                                                 |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|            | Air Handling Unit     |                                                                                   |                                                                                   |                                                                                   | x                                                                                 |                                                                                    |                                                                                     |                                                                                     |                                                                                     |

Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**



[nVent.com/CADDY](https://nVent.com/CADDY)